


4.65m TILLER STEER

GENERAL ARRANGEMENT

PRINCIPAL PARTICULARS

LOA:	4.93 m
LENGTH:	4.65 m
BEAM:	2.00 m
DEPTH:	1.02 m
DRAFT:	0.13m
D/RISE:	14° @ TRAN.
POWER:	35HP (TILLER)

Note: Layout can be customised by owner
Owner Advised to provide sun protection

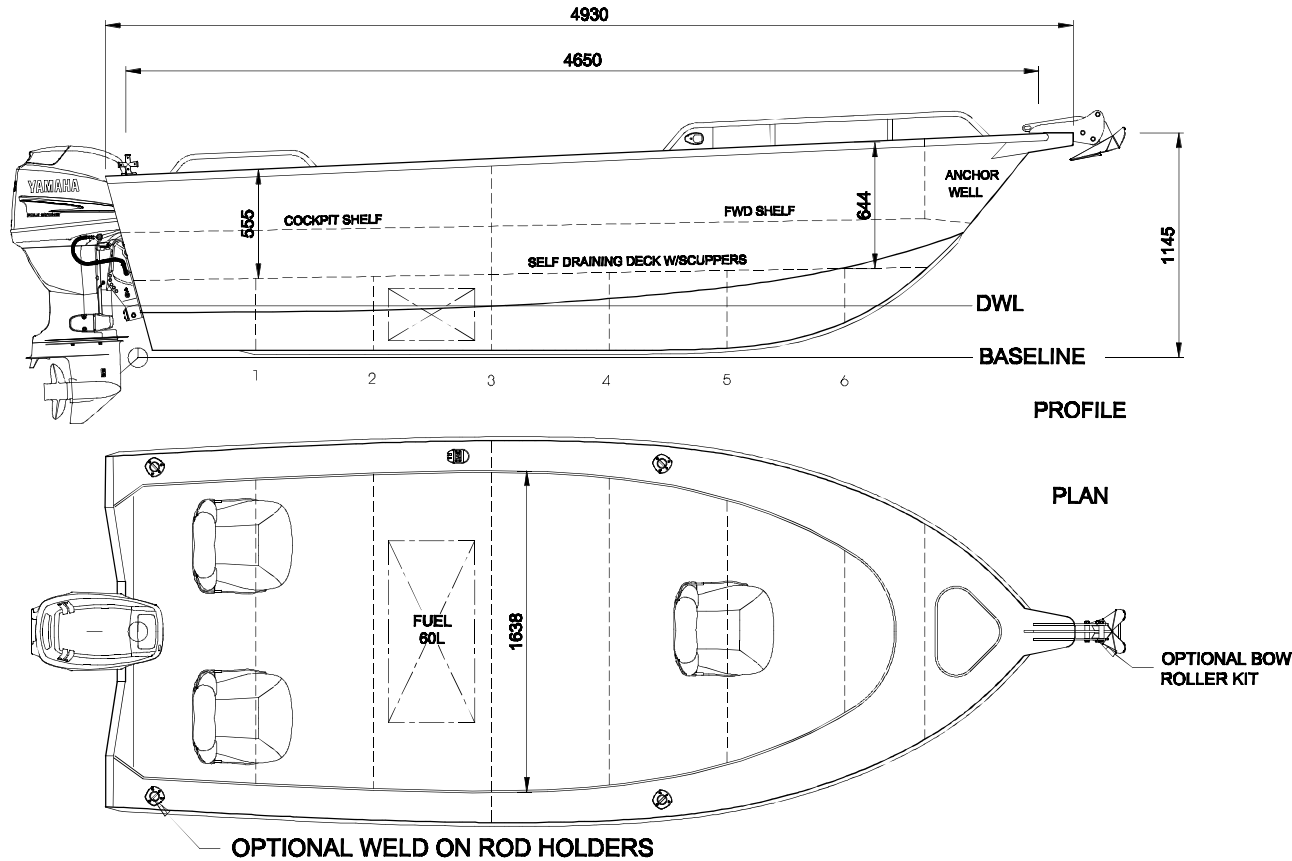

ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN

AUSTRALIAN BUILDERS PLATE	
BUILDER	*YOUR NAME*
HIN AU-	*SEE REGISTRATION*
Max	7 = 40 hp
	= 75 kg
Max	3 = 270 kg
Max	3 + = 340 kg
Buoyancy	BASIC Flotation
<p>⚠ Alteration of the boat's hull or permanent fittings may invalidate the particulars on this plate.</p> <p>A REDUCTION IN MAXIMUM NUMBER OF PERSONS MUST BE MADE IN ADVERSE WEATHER CONDITIONS OR WHEN ON THE OPEN SEA.</p>	

- Design in compliance with AS1799-1 2009
- Structure in accordance with ISO 12215
- material:
 - All plating 4mm 5083 aluminium.
 - All extrusions 6061 aluminium
- Builders plate, Jig, Drawings & Photo CD included with kit.
- Bollards, Scuppers, Inspection port & Drain plug included in the kit.
- 5 days per week helpdesk available
- Customization available.
- Flotation foam & most fit out parts available, check catalogue for pricing.
- HIN number engraved in kit & registered.

www.platealloy.com



4.65m TILLER STEER



www.platealloy.com

ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN




PLATE ALLOY