


Note: Layout can be customised by owner  
Owner Advised to provide sun protection

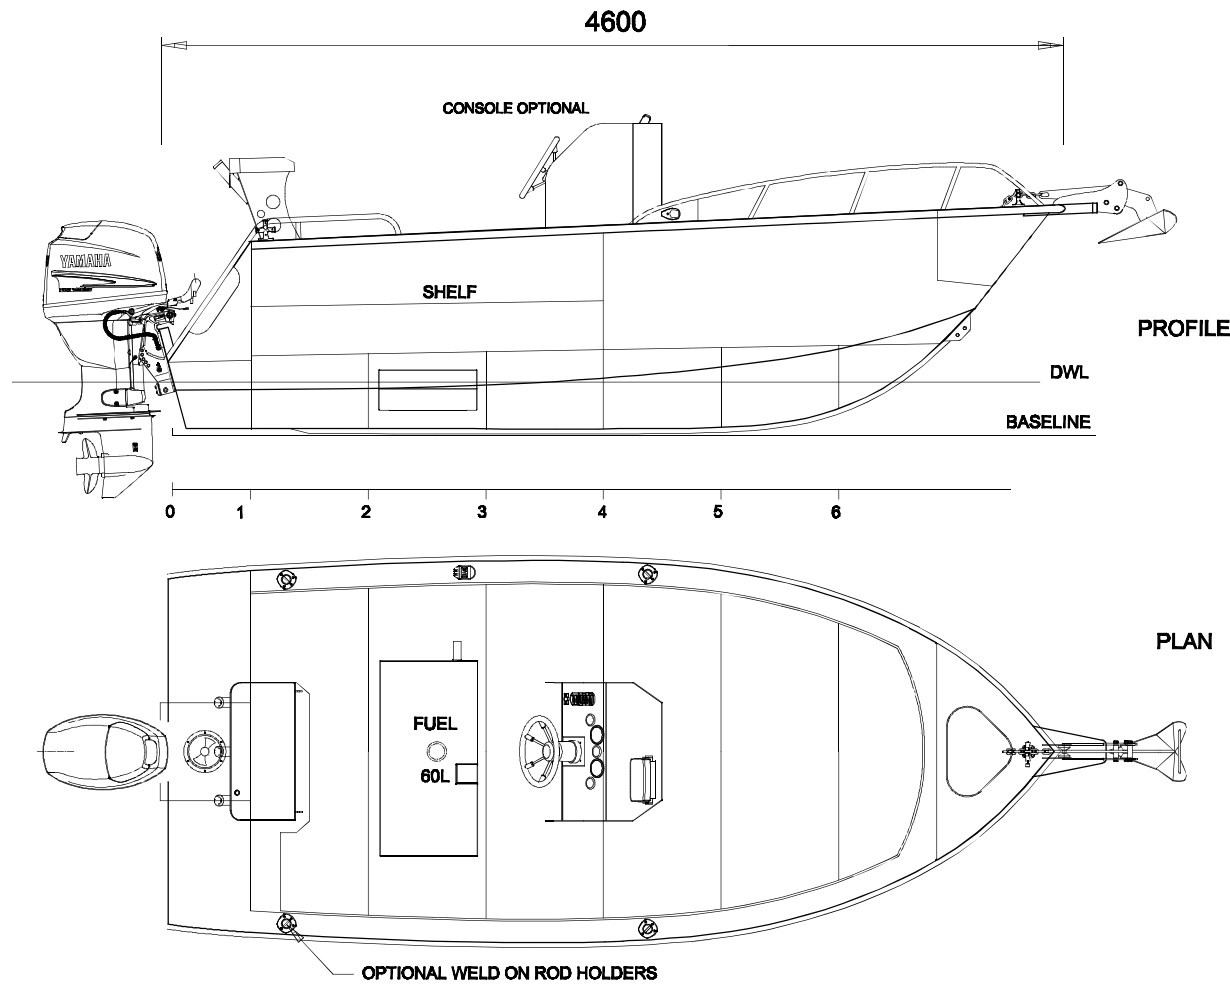

# 4.6m CENTRE CONSOLE GENERAL ARRANGEMENT

## PRINCIPAL PARTICULARS

LOA: 4.6 m  
 LENGTH: 4.5 m  
 BEAM: 2.00 m  
 DEPTH: 1.08 m  
 DRAFT: 0.25m (HULL)  
 D/RISE: 14° @ TRAN.  
 DISPL: 550kg DRY -w- 50HP

Boat hull to be foam filled.



ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN

www.platealloy.com

AUSTRALIAN BUILDERS PLATE	
BUILDER	YOUR NAME
HIN AU	*SEE REGISTRATION
Max $\uparrow$	= 70 hp
	= 110 kg
Max $\uparrow$ 4	= 320 kg
Max $\uparrow$ + $\uparrow$ + $\uparrow$	= 575 kg
Buoyancy	BASIC Flotation
<p><b>!</b> Alteration of the boat's hull or permanent fittings may invalidate the particulars on this plate.</p> <p>A REDUCTION IN MAXIMUM NUMBER OF PERSONS MUST BE MADE IN ADVERSE WEATHER CONDITIONS OR WHEN ON THE OPEN SEA.</p>	

- Design in compliance with AS1799-1 2009
- Structure in accordance with ISO 12215
- material:
  - All plating 4mm 5083 aluminium.
  - All extrusions 6061 aluminium
- Builders plate, Jig, Drawings & Photo CD included with kit.
- Bollards, Scuppers, Inspection port & Drain plug included in the kit.
- 5 days per week helpdesk available
- Customization available.
- Flotation foam & most fit out parts available, check catalogue for pricing.
- HIN number engraved in kit & registered.



# 4.6m CENTRE CONSOLE



www.platealloy.com

ACTUAL KIT MIGHT DIFFER FROM PICTURES SHOWN

